


TerraGrid Core 40

TerraGrid Core 40 - Roll size 4m x 30m

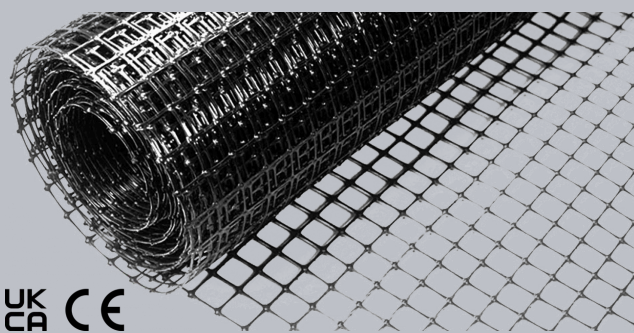

| CHARACTERISTIC | VALUE |
|----------------|--|
| Description | TerraGrid Core 40 - Roll size 4m x 30m |

SPECIFICATION

GENERAL INFORMATION

| | |
|-----------------------|-------------------|
| Stock code | Terragrid/core/40 |
| Third party certified | CE UKCA |
| Roll sizes | 4m x 30m |

GEOGRID PROPERTIES

| | | |
|-------------------------------|--------------|--------|
| Tensile strength (MD) | EN ISO 10319 | 40kN/m |
| Tensile strength (CMD) | EN ISO 10319 | 40kN/m |
| Tensile load (2% strain) (MD) | EN ISO 10319 | 15kN/m |
| Tensile load (2% CMD) | EN ISO 10319 | 15kN/m |
| Tensile load (5% strain) (MD) | EN ISO 10319 | 28kN/m |
| Tensile load (5% CMD) | EN ISO 10319 | 28kN/m |
| Junction efficiency | | 95% |

NOTES

To be covered within one month of the date of installation.

Predicted to be durable for a minimum of 50 years in natural soils with $4 \leq \text{pH} \leq 9$ and soil temperatures ≤ 25 degrees C.

- ▶ Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).
- ▶ Some imagery within our materials is illustrative in nature and may not depict the exact product supplied.