


## **TerraGrid Core 40**

TerraGrid Core 40 - Roll size 4m x 30m

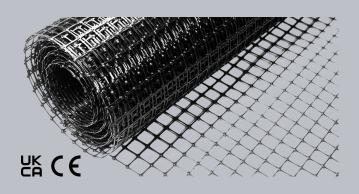

| CHARACTERISTIC | VALUE                                  |
|----------------|--|
| Description    | TerraGrid Core 40 - Roll size 4m x 30m |

# **SPECIFICATION**

#### **GENERAL INFORMATION**

| Stock code            | Terragrid/core/40 |
|-----------------------|-------------------|
| Range                 | TerraGrid         |
| Third party certified | CE                |
|                       | UKCA              |
| Roll sizes            | 4m x 30m          |

#### **GEOGRID PROPERTIES**

| Tensile strength (MD)         | EN ISO 10319 | 40kN/m |
|-------------------------------|--------------|--------|
| Tensile strength (CMD)        | EN ISO 10319 | 40kN/m |
| Tensile load (2% strain) (MD) | EN ISO 10319 | 15kN/m |
| Tensile load (2% CMD)         | EN ISO 10319 | 15kN/m |
| Tensile load (5% strain (MD)  | EN ISO 10319 | 28kN/m |
| Tensile load (5% CMD)         | EN ISO 10319 | 28kN/m |
| Junction efficiency           |              | 95%    |

### **NOTES**

To be covered within one month of the date of installation.

Predicted to be durable for a minimum of 50 years in natural soils with  $4 \le pH \le 9$  and soil temperatures  $\le 25$  degrees C.

Tel: 01543 440 480 Fax: 01543 440 444 info@geoworks.eco geoworks.eco





- Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
- It is the responsibility of all users to satisfy themselves the above data is current.
- Installation details are available in the knowledge base.
- All Geoworks products are supplied subject to our terms and conditions of sale.

  Some imagery within our materials is illustrative in nature and may not depict the exact product supplied.

Tel: 01543 440 480 Fax: 01543 440 444 info@geoworks.eco geoworks.eco



