


## FasTrack 18/18 B

FasTrack 1818B Woven Geotextile, 2000N, 91g/m<sup>2</sup> - 5.25m x 100m roll

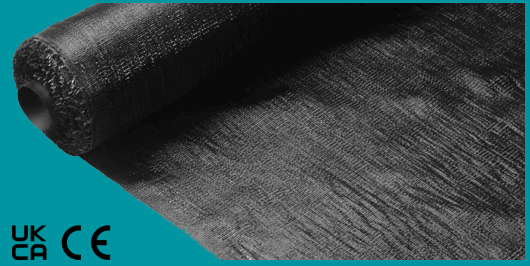

### DESCRIPTION

FasTrack 1818B Woven Geotextile, 2000N, 91g/m<sup>2</sup> - 5.25m x 100m roll

## SPECIFICATION

### General information

Stock code	GTSG/FASTRACK/1818B
Range	FasTrack
Third party certified	UKCA CE
Roll sizes	5.25m x 100m
Geotextile product range	FasTrack

### Geotextile properties

Material		Polypropylene
Tensile strength (MD)	EN ISO 10319	17.25kN/m
Tensile strength (CMD)	EN ISO 10319	17.25kN/m
Elongation at max load (MD)	EN ISO 10319	26%
Elongation at max load (CMD)	EN ISO 10319	26%
Dynamic perforation resistance	EN ISO 13433	16mm
CBR puncture resistance	EN ISO 12236	2000N

<b>Dynamic cone drop</b>	EN ISO 13433	16mm
<b>Water permeability</b>	EN ISO 11058	23L/m <sup>2</sup> .s
<b>Characteristic opening size</b>	EN ISO 12956	305µm
<b>Thickness under 2kPa</b>	EN ISO 9863-1	0.45mm
<b>Weight</b>	EN ISO 9864	91g/m <sup>2</sup>

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

