


FasTrack 60/60

FasTrack 6060 Woven Geotextile, 5600N, 258g/m² - 5.25m x 100m roll

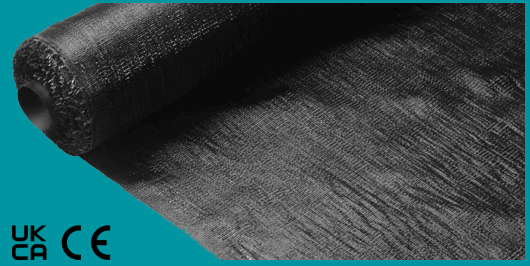

DESCRIPTION

FasTrack 6060 Woven Geotextile, 5600N, 258g/m² - 5.25m x 100m roll

SPECIFICATION

General information

Stock code	GTSG/FASTRACK/6060	
Range	FasTrack	
Third party certified	UKCA CE	
Roll sizes	5.25m x 100m	
Geotextile product range	FasTrack	

Geotextile properties

Material	Polypropylene	
Tensile strength (MD)	EN ISO 10319	60kN/m
Tensile strength (CMD)	EN ISO 10319	60kN/m
Elongation at max load (MD)	EN ISO 10319	13%
Elongation at max load (CMD)	EN ISO 10319	13%
Static puncture resistance	EN ISO 12236	5.6kN
Dynamic perforation resistance	EN ISO 13433	9mm

CBR puncture resistance	EN ISO 12236	5600N
Dynamic cone drop	EN ISO 13433	9mm
Water permeability	EN ISO 11058	23L/m ² .s
Characteristic opening size	EN ISO 12956	280µm
Thickness under 2kPa	EN ISO 9863-1	1.2mm
Weight	EN ISO 9864	240g/m ²

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

