


## FasTrack 80/80

FasTrack 8080 Woven Geotextile, 9000N, 356g/m<sup>2</sup> - 5.25m x 100m roll

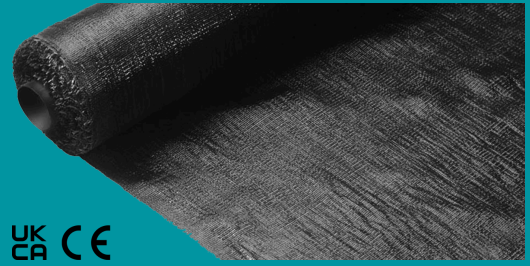

### DESCRIPTION

FasTrack 8080 Woven Geotextile, 9000N, 356g/m<sup>2</sup> - 5.25m x 100m roll

## SPECIFICATION

### General information

Stock code	GTSG/FASTRACK/8080	
Range	FasTrack	
Third party certified	UKCA CE	
Roll sizes	5.25m x 100m	
Geotextile product range	FasTrack	

### Geotextile properties

Material	Polypropylene	
Tensile strength (MD)	EN ISO 10319	80kN/m
Tensile strength (CMD)	EN ISO 10319	80kN/m
Elongation at max load (MD)	EN ISO 10319	15%
Elongation at max load (CMD)	EN ISO 10319	10%
Static puncture resistance	EN ISO 12236	9kN
Dynamic perforation resistance	EN ISO 13433	9mm

<b>CBR puncture resistance</b>	EN ISO 12236	9000N
<b>Dynamic cone drop</b>	EN ISO 13433	9mm
<b>Water permeability</b>	EN ISO 11058	10L/m <sup>2</sup> .s
<b>Characteristic opening size</b>	EN ISO 12956	230µm
<b>Thickness under 2kPa</b>	EN ISO 9863-1	1.3mm
<b>Weight</b>	EN ISO 9864	356g/m <sup>2</sup>

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

