


ProtectaWeb 200

ProtectaWeb 200mm deep HDPE geocellular confinement system

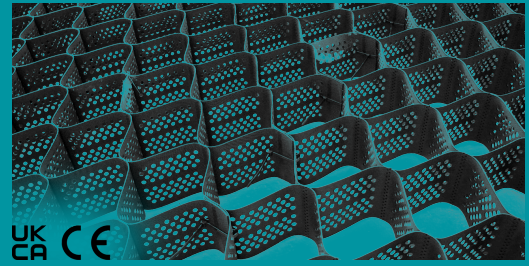

DESCRIPTION

ProtectaWeb 200mm deep HDPE geocellular confinement system

SPECIFICATION

General information

| | |
|------------|-----------------|
| Stock code | Protectaweb/200 |
| Range | ProtectaWeb |

Geocell

| | |
|--|---------------------------|
| Material | High density polyethylene |
| Colour | Black |
| Density (g/cm ³) | ≥0.94 |
| Carbon black content (%) | ≥1.5 |
| Tensile strength (MD) | 20 kN/m |
| Tensile strength of perforated strip MD (kN/m) | 10 kN/m |
| Elongation at max load | 15% |
| Seam Peel Strength ³ (N/100mm depth cell) | ≥1420 |
| Bonded ranges (mm) | 356±2.5 |

| | |
|------------------------------------|-------------------|
| Cell depth | 200 mm |
| Expanded cell width | 260 mm |
| Expanded cell length | 224 mm |
| Number of cells per section | 330 |
| Expanded section width | 2.71 m |
| Expanded section length | 7.38 m |
| Expanded section area | 20 m ² |

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

