


ProtectaWeb 75

ProtectaWeb 75mm deep HDPE geocellular confinement system

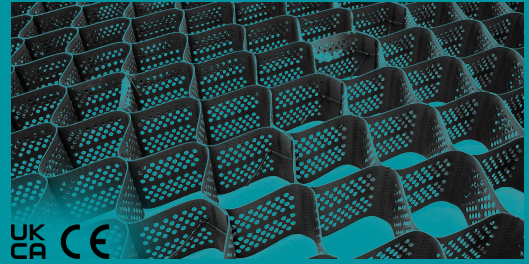

DESCRIPTION

ProtectaWeb 75mm deep HDPE geocellular confinement system

SPECIFICATION

General information

Stock code

Protectaweb/75

Range

ProtectaWeb

Geocell

Material

High density polyethylene

Colour

Black

Density (g/cm³)

≥0.94

Carbon black content (%)

≥1.5

Tensile strength (MD)

20 kN/m

Tensile strength of perforated strip
MD (kN/m)

10 kN/m

Elongation at max load

15%

Seam Peel Strength³ (N/100mm
depth cell)

≥1420

Bonded ranges (mm)

356±2.5

Cell depth

75 mm

Expanded cell width	260 mm
Expanded cell length	224 mm
Number of cells per section	330
Expanded section width	2.71 m
Expanded section length	7.38 m
Expanded section area	20 m ²

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available in the [knowledge base](#).
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

