GEOWORKS
GEOSYNTHETICS BY WREKIN

GSCELLTRACK/38B (discontinued)

Celltrack 38 500mm x 500mm x 38mm black small panel

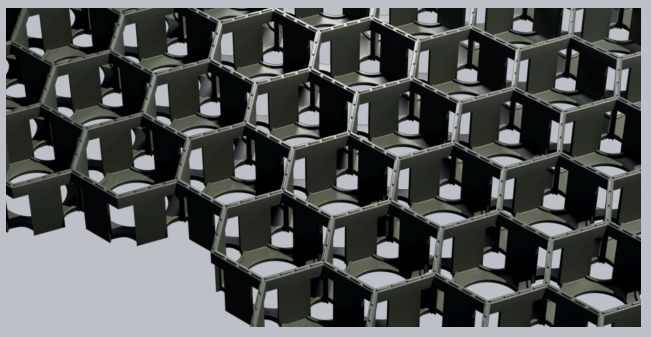

SUPERSEDED BY

Stock code	Description
GSCELLTRACK/LP38BB	Celltrack 38 1,200mm x 800mm x 38mm black large panel

CHARACTERISTIC	VALUE
Description	Celltrack 38 500mm x 500mm x 38mm black small panel

SPECIFICATION

GENERAL INFORMATION

Stock code	GSCELLTRACK/38B
Range	CellTrack

Tel: 01543 440 480
Fax: 01543 440 444
info@geoworks.eco
geoworks.eco

bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED
FM 32898 EMS 758038
SGS UKAS MANAGEMENT SYSTEMS 0005

GEOCELLULAR PAVING

Material	100% recycled High Density Polyethylene (HDPE)
Colour	Black
Cell shape	Hexaganol (Honeycomb)
Height	38 mm
Cell diameter	60 mm
Open space	>90%
UV	UV stabiliser
Weight per unit	+/- 950g
Weight per m2	+/- 3.8kg
Breaking strain (unfilled)	+/- 135 t/m2
Biological resistance	Very high
Chemical resistance	Very high
Connection system	Integrated connection system

NOTES

Gravel pavers should be overfilled by approximately 10–20 mm (1–2 cm) above the top of the grid cells.

Why Overfill?

- To hide the grid: A slight overfill conceals the plastic structure of the paver, making the surface visually continuous with the surrounding area.
- To allow for settling and compaction: Gravel will settle over time due to foot or vehicle traffic. The overfill compensates for this, maintaining coverage and performance.
- To maintain a smooth surface: Without enough overfill, the tops of the grid can become exposed, especially in high-traffic areas, which may lead to discomfort, wear, or damage.

This is the small panel variant of CellTrack, with panels available in 500mm x 500mm sections and depth options of either 38mm or 50mm. A large panel variant is available.

Packaging:

Quantity per pallet	m^2 per pallet	Quantity per fill truck load	m^2 per full truck load	Dimensions of pallet
240	$60m^2$	5,760 (24 pallets)	$1,440m^2$	110cm x 110cm x 235cm (one-way pallet)

Tel: 01543 440 480
Fax: 01543 440 444
info@geoworks.eco
geoworks.eco

bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED
FM 32898 EMS 758038
SGS UKAS MANAGEMENT SYSTEMS 0005

- Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
- It is the responsibility of all users to satisfy themselves the above data is current.
- Installation details are available in the knowledge base.
- All Geoworks products are supplied subject to our Terms and Conditions of Sale.

Tel: 01543 440 480
Fax: 01543 440 444
info@geoworks.eco
geoworks.eco

bsi ISO 9001 Quality Management Systems CERTIFIED ISO 14001 Environmental Management CERTIFIED
FM 32898 EMS 758038
SGS UKAS MANAGEMENT SYSTEMS 0005