


# GSCELLTRACK/50B (discontinued)

Celltrack 50 500mm x 500mm x 50mm black small panel

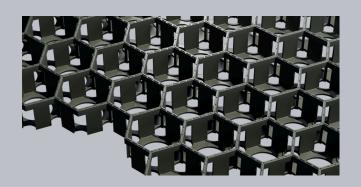

# **SUPERSEDED BY**

Stock code	Description	
GSCELLTRACK/LP50BB	Celltrack 50 1,200mm x 800mm x 50mm black large panel	

CHARACTERISTIC	VALUE	
Description	Celltrack 50 500mm x 500mm x 50mm black small panel	

# **SPECIFICATION**

#### **GENERAL INFORMATION**

Stock code	GSCELLTRACK/50B
Range	CellTrack





#### **GEOCELLULAR PAVING**

Material	100% recycled High	
	Density	
	Polyethylene	
	(HDPE)	
Colour	Black	
Cell shape	Hexaganol	
	(Honeycomb)	
Height	50 mm	
Cell diameter	60 mm	
Open space	>90%	
UV	UV stabiliser	
Weight per unit	+/- 1.2kg	
Weight per m2	+/- 4.8kg	
Breaking strain	+/- 105 t/m2 (PTV	
(unfilled)	828)	
Biological	Very high	
resistance		
Chemical	Very high	
resistance		
Connection system	Integrated	
	connection system	
· · · · · · · · · · · · · · · · · · ·		

### **NOTES**

Gravel pavers should be overfilled by approximately 10-20 mm (1-2 cm) above the top of the grid cells.

#### Why Overfill?

- ► To hide the grid: A slight overfill conceals the plastic structure of the paver, making the surface visually continuous with the surrounding area.
- ► To allow for settling and compaction: Gravel will settle over time due to foot or vehicle traffic. The overfill compensates for this, maintaining coverage and performance.
- ► To maintain a smooth surface: Without enough overfill, the tops of the grid can become exposed, especially in high-traffic areas, which may lead to discomfort, wear, or damage.

This is the small panel variant of CellTrack, with panels available in 500mm x 500mm sections and depth options of either 38mm or 50mm. A large panel variant is available.

# **PACKAGING:**

Quantity pallet	per	m <sup>2</sup> per pallet	Quantity per fill truck load	m <sup>2</sup> per full truck load	Dimensions of pallet
200		50m <sup>2</sup>	4,800 (24 pallets)	1,200m <sup>2</sup>	110cm x 110cm x 235cm (one-way pallet)

Tel: 01543 440 480 Fax: 01543 440 444 info@geoworks.eco geoworks.eco





- Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- Installation details are available in the knowledge base.
- All Geoworks products are supplied subject to our <u>Terms and Conditions of Sale.</u>

Tel: 01543 440 480 Fax: 01543 440 444 info@geoworks.eco geoworks.eco



