


FasTrack 29/29

FasTrack 2929 Woven Geotextile, 4100N, 173g/m² - 5.25m x 100m roll

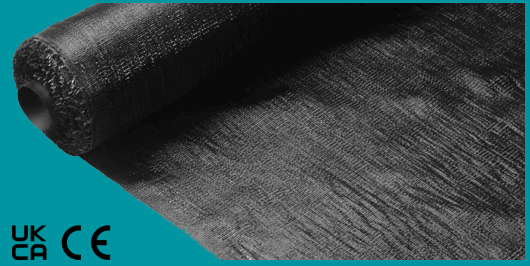

DESCRIPTION

FasTrack 2929 Woven Geotextile, 4100N, 173g/m² - 5.25m x 100m roll

SPECIFICATION

General information

| | | |
|--------------------------|--------------------|--|
| Stock code | GTSG/FASTRACK/2929 | |
| Range | FasTrack | |
| Third party certified | UKCA CE | |
| Roll sizes | 5.25m x 100m | |
| Geotextile product range | FasTrack | |

Geotextile properties

| | | |
|--------------------------------|---------------|--------|
| Material | Polypropylene | |
| Tensile strength (MD) | EN ISO 10319 | 29kN/m |
| Tensile strength (CMD) | EN ISO 10319 | 29kN/m |
| Elongation at max load (MD) | EN ISO 10319 | 26% |
| Elongation at max load (CMD) | EN ISO 10319 | 26% |
| Static puncture resistance | EN ISO 12236 | 4.1kN |
| Dynamic perforation resistance | EN ISO 13433 | 11mm |

| | | |
|------------------------------------|---------------|-----------------------|
| CBR puncture resistance | EN ISO 12236 | 4100N |
| Dynamic cone drop | EN ISO 13433 | 11mm |
| Water permeability | EN ISO 11058 | 23L/m ² .s |
| Characteristic opening size | EN ISO 12956 | 330µm |
| Thickness under 2kPa | EN ISO 9863-1 | 1mm |
| Weight | EN ISO 9864 | 173g/m ² |

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

