


FasTrack 40/40

FasTrack 4040 Woven Geotextile, 5000N, 185g/m² - 5.25m x 100m roll

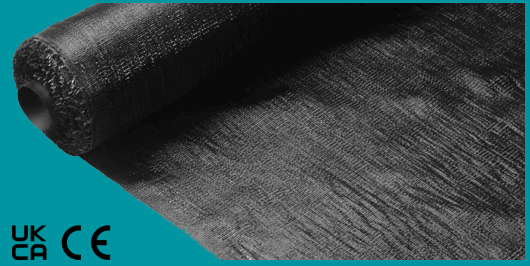

DESCRIPTION

FasTrack 4040 Woven Geotextile, 5000N, 185g/m² - 5.25m x 100m roll

SPECIFICATION

General information

Stock code	GTSG/FASTRACK/4040	
Range	FasTrack	
Third party certified	UKCA CE	
Roll sizes	5.25m x 100m	
Geotextile product range	FasTrack	

Geotextile properties

Material	Polypropylene	
Tensile strength (MD)	EN ISO 10319	40kN/m
Tensile strength (CMD)	EN ISO 10319	40kN/m
Elongation at max load (MD)	EN ISO 10319	17.5%
Elongation at max load (CMD)	EN ISO 10319	14%
Static puncture resistance	EN ISO 12236	5kN
Dynamic perforation resistance	EN ISO 13433	12mm

CBR puncture resistance	EN ISO 12236	5000N
Dynamic cone drop	EN ISO 13433	12mm
Water permeability	EN ISO 11058	25L/m ² .s
Characteristic opening size	EN ISO 12956	350µm
Thickness under 2kPa	EN ISO 9863-1	1mm
Weight	EN ISO 9864	185g/m ²

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

