


## FasTrack 60/60

FasTrack 6060 Woven Geotextile, 5600N, 258g/m<sup>2</sup> - 5.25m x 100m roll

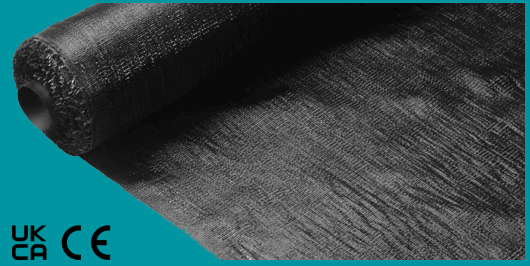

### DESCRIPTION

FasTrack 6060 Woven Geotextile, 5600N, 258g/m<sup>2</sup> - 5.25m x 100m roll

## SPECIFICATION

### General information

Stock code	GTSG/FASTRACK/6060	
Range	FasTrack	
Third party certified	UKCA CE	
Roll sizes	5.25m x 100m	
Geotextile product range	FasTrack	

### Geotextile properties

Material	Polypropylene	
Tensile strength (MD)	EN ISO 10319	60kN/m
Tensile strength (CMD)	EN ISO 10319	60kN/m
Elongation at max load (MD)	EN ISO 10319	13%
Elongation at max load (CMD)	EN ISO 10319	13%
Static puncture resistance	EN ISO 12236	5.6kN
Dynamic perforation resistance	EN ISO 13433	9mm

<b>CBR puncture resistance</b>	EN ISO 12236	5600N
<b>Dynamic cone drop</b>	EN ISO 13433	9mm
<b>Water permeability</b>	EN ISO 11058	23L/m <sup>2</sup> .s
<b>Characteristic opening size</b>	EN ISO 12956	280µm
<b>Thickness under 2kPa</b>	EN ISO 9863-1	1.2mm
<b>Weight</b>	EN ISO 9864	240g/m <sup>2</sup>

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

