


## FasTrack 1800

FasTrack 1800 Woven Geotextile, 1900N, 85g/m<sup>2</sup> - 4.5m x 100m roll

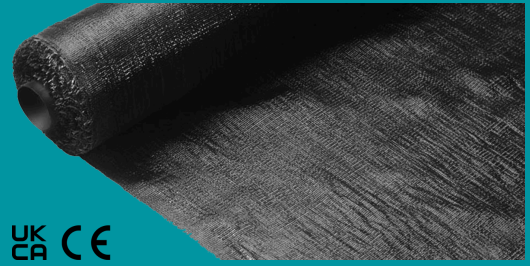

### DESCRIPTION

FasTrack 1800 Woven Geotextile, 1900N, 85g/m<sup>2</sup> - 4.5m x 100m roll

## SPECIFICATION

### General information

Stock code	GTSG/FASTRACK/1800
Range	FasTrack
Third party certified	UKCA CE
Roll sizes	4.5m x 100m
Geotextile product range	FasTrack

### Geotextile properties

Material		Polypropylene
Tensile strength (MD)	EN ISO 10319	18kN/m
Tensile strength (CMD)	EN ISO 10319	12kN/m
Elongation at max load (MD)	EN ISO 10319	25%
Elongation at max load (CMD)	EN ISO 10319	25%
Static puncture resistance	EN ISO 12236	1.9kN
Dynamic perforation resistance	EN ISO 13433	18mm

<b>CBR puncture resistance</b>	EN ISO 12236	1900N
<b>Dynamic cone drop</b>	EN ISO 13433	18mm
<b>Water permeability</b>	EN ISO 11058	18L/m <sup>2</sup> .s
<b>Characteristic opening size</b>	EN ISO 12956	200µm
<b>Weight</b>	EN ISO 9864	85g/m <sup>2</sup>

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

