


FasTrack 609[®] Orange

FasTrack 609 orange woven geotextile, 1500N, 75g/m² - 4.5m x 100m roll

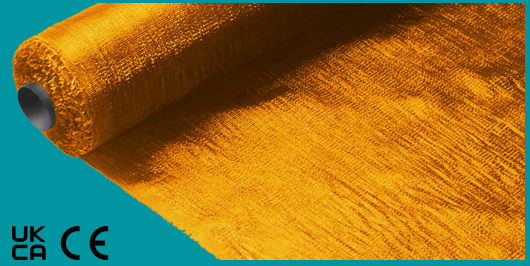

UK
CA CE

DESCRIPTION

FasTrack 609 orange woven geotextile, 1500N, 75g/m² - 4.5m x 100m roll

SPECIFICATION

General information

Stock code	GTSG/FASTRACK/609/O	
Range	FasTrack	
Third party certified	UKCA CE	
Roll sizes	4.5m x 100m	
Geotextile product range	FasTrack	

Geotextile properties

Material	Polypropylene	
Tensile strength (MD)	EN ISO 10319	18kN/m
Tensile strength (CMD)	EN ISO 10319	10kN/m
Elongation at max load (MD)	EN ISO 10319	25%
Elongation at max load (CMD)	EN ISO 10319	25%
Static puncture resistance	EN ISO 12236	1.5kN
Dynamic perforation resistance	EN ISO 13433	19mm

CBR puncture resistance	EN ISO 12236	1500N
Dynamic cone drop	EN ISO 13433	19mm
Water permeability	EN ISO 11058	16L/m ² .s
Characteristic opening size	EN ISO 12956	300µm
Weight	EN ISO 9864	75g/m ²

NOTES

This product is suitable for high visibility and its bright colour alerts excavators of potential dangers.

1. Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
2. It is the responsibility of all users to satisfy themselves the above data is current.
3. Installation details are available on request.
4. All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).

