


## FasTrack 609<sup>®</sup> Orange

FasTrack 609 orange woven geotextile, 1500N, 75g/m<sup>2</sup> - 4.5m x 100m roll

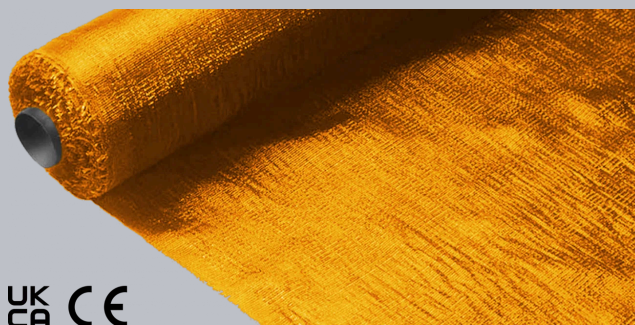

CHARACTERISTIC	VALUE
Description	FasTrack 609 orange woven geotextile, 1500N, 75g/m <sup>2</sup> - 4.5m x 100m roll

## SPECIFICATION

### GENERAL INFORMATION

Stock code	GTSG/FASTRACK/609/O
Range	FasTrack
Third party certified	UKCA CE
Roll sizes	4.5m x 100m
Geotextile product range	FasTrack

### GEOTEXTILE PROPERTIES

Material		Polypropylene
Tensile strength (MD)	EN ISO 10319	18kN/m
Tensile strength (CMD)	EN ISO 10319	10kN/m
Elongation at max load (MD)	EN ISO 10319	25%
Elongation at max load (CMD)	EN ISO 10319	25%
Dynamic perforation resistance	EN ISO 13433	19mm
CBR puncture resistance	EN ISO 12236	1500N
Dynamic cone drop	EN ISO 13433	19mm
Water permeability	EN ISO 11058	16L/m <sup>2</sup> .s
Characteristic opening size	EN ISO 12956	300µm
Weight	EN ISO 9864	75g/m <sup>2</sup>

## NOTES

This product is suitable for high visibility and its bright colour alerts excavators of potential dangers.

- ▶ Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
- ▶ It is the responsibility of all users to satisfy themselves the above data is current.
- ▶ Installation details are available in the [knowledge base](#).
- ▶ All Geoworks products are supplied subject to our [Terms and Conditions of Sale](#).
- ▶ Some imagery within our materials is illustrative in nature and may not depict the exact product supplied.