


Trinter Erosion Control mesh

Trinter Erosion Control Mesh - PP + HDPE Geomat with a 25mm thickness. Roll size 2m x 25m

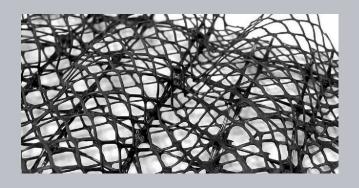

CHARACTERISTIC	VALUE
Description	Trinter Erosion Control Mesh - PP + HDPE Geomat with a 25mm thickness. Roll size 2m x 25m

SPECIFICATION

GENERAL INFORMATION

Stock code	Trinter
Range	Trinter
Roll sizes	2m x 25m

GEOMAT

Material	High density
	polyethylene
Colour	Black
Net configuration	Complex
Product thickness	25 mm
Number of	22
undulations per	
metre	
Undulation mesh	10 mm
length	
Undulation mesh	10 mm
width	
Tensile strength at	2 kN/m
10% elongation	
Tensile strength at	3 kN/m
20% elongation	
Soil loss ratio - rain	2.71 (0.37)
intensity 50mm/h	
Soil loss ratio - rain	3.10 (0.32)
intensity 100mm/h	
Soil loss ratio - rain	3.35 (0.30)
intensity 150mm/h	
Maximum Shear	288 (6)
Stress	
Longevity	> 36

Tel: 01543 440 480 Fax: 01543 440 444 info@geoworks.eco geoworks.eco





- Geoworks (trading as Wrekin Products Ltd.) continually seeks to improve its products and, therefore, reserves the right to alter product specifications without prior notice.
- It is the responsibility of all users to satisfy themselves the above data is current.
- Installation details are available in the knowledge base.
- All Geoworks products are supplied subject to our <u>Terms and Conditions of Sale.</u>
 Some imagery within our materials is illustrative in nature and may not depict the exact product supplied.

Tel: 01543 440 480 Fax: 01543 440 444 info@geoworks.eco geoworks.eco



